

## Highlights:


---

- null
- null
- null
- null
- null

## Product information:

---

The PAC151 is a hybrid power/audio cable which can be used in a variety of applications. The cable consists of 3 x 1,5mm<sup>2</sup> power section and a 2 x 0.22mm<sup>2</sup> 110 Ohm signal pair. The signal pair can be used for analog audio, digital audio or DMX. The power and signal cable each have a separate jacket which makes it easy to split out the cables at the end.

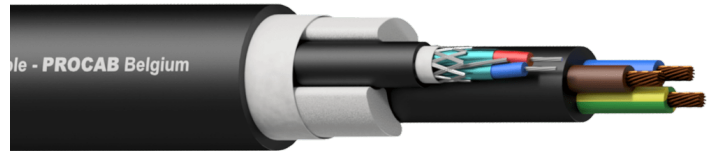

## Components:

---

- CableType: HMX224 - 24 AWG Balanced signal / DMX-AES cable
- CableType: HPC3G1.5 - 3G1.5 3 x 1.5 mm<sup>2</sup> PVC power cable


## Certification:

---



## Properties:

---



## Product Features:

---

Application	null
Series	null

## Physical Characteristics:

---

Components		1 x HMX224
		1 x HPC3G1.5
Outer jacket	Material	Highflex PVC 15.9 mm (Ø)
	Colours	Black
Type of cable		Power & 1 x DMX-AES 110 Ω cable
Filling		Non-woven (PET/PA) tape

## Standards & regulations:

---

RoHS2 compliant	According EU Directive 2011/65/EU
Reach compliant	According EC 1907/2006
Flammability test	According EN 60332-1-2

## Mechanical Characteristics:

---

Temperature range	Fixed installation	- 59 °F till + 158 °F
	Mobile installation	- 41 °F till + 167 °F
Bending radius	Fixed installation	6 x outer diameter
	Mobile installation	8 x outer diameter

## Variants:

---

- PAC151/1 - 100 meter
- PAC151/3 - 300 meter

## Cross sections:

---

