

## Highlights:


---

- null
- null
- null
- null
- null

## Product information:

---

The PAC251 is a hybrid power/audio cable which consists of 3 x 2,5mm<sup>2</sup> power section and a 2 x 0.22mm<sup>2</sup> 110 Ohm signal pair, this makes it ideal for rental applications. The signal pair can be used for analog audio, digital audio or DMX. The power and signal cable each have a separate jacket which makes it easy to split out the cables at the end.

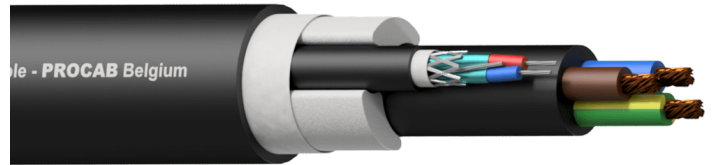

## Components:

---

- CableType: HMX224 - 24 AWG Balanced signal / DMX-AES cable
- CableType: HPC3G2.5 - 3G2.5 3 x 2.5 mm<sup>2</sup> PVC power cable


## Certification:

---



## Properties:

---



## Product Features:

---

Application	null
Series	null

## Physical Characteristics:

---

Components		1 x HMX224
		1 x HPC3G2.5
Outer jacket	Material	Highflex PVC 17.5 mm (Ø)
	Colours	Black
Type of cable		Power & 1 x DMX-AES 110 Ω cable
Filling		Non-woven (PET/PA) tape

## Standards & regulations:

---

RoHS2 compliant	According EU Directive 2011/65/EU
Reach compliant	According EC 1907/2006
Flammability test	According EN 60332-1-2

## Mechanical Characteristics:

---

Temperature range	Fixed installation	- 59 °F till + 158 °F
	Mobile installation	- 41 °F till + 167 °F
Bending radius	Fixed installation	6 x outer diameter
	Mobile installation	8 x outer diameter

## Variants:

---

- PAC251/1 - 100 meter
- PAC251/3 - 300 meter

## Cross sections:

---

