

### Highlights:


---

- null
- null
- null
- null
- null

### Product information:

---

The PAC252 is a hybrid power/audio cable which consists of 3 x 2,5mm<sup>2</sup> power section and two times a 2 x 0.22mm<sup>2</sup> 110 Ohm signal pair. The dual signal pair makes it ideal for applications where a stereo signal is needed or where the second pair is used as redundancy. The power and the 2 signal cables each have a separate jacket which makes it easy to split out the cables at the end.

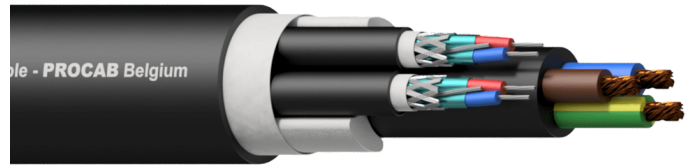

### Components:

---

- CableType: HMX224 - 24 AWG Balanced signal / DMX-AES cable
- CableType: HPC3G2.5 - 3G2.5 3 x 2.5 mm<sup>2</sup> PVC power cable


### Certification:

---



### Properties:

---



### Product Features:

---

Application	null
Series	null

## Physical Characteristics:

---

Components		2 x HMX224
		1 x HPC3G2.5
Outer jacket	Material	Highflex PVC 18.0 mm (Ø)
	Colours	Black
Type of cable		Power & 2 x DMX-AES 110 Ω cable
Filling		Non-woven (PET/PA) tape

## Standards & regulations:

---

RoHS2 compliant	According EU Directive 2011/65/EU
Reach compliant	According EC 1907/2006
Flammability test	According EN 60332-1-2

## Mechanical Characteristics:

---

Temperature range	Fixed installation	- 59 °F till + 158 °F
	Mobile installation	- 41 °F till + 167 °F
Bending radius	Fixed installation	6 x outer diameter
	Mobile installation	8 x outer diameter

## Variants:

---

- PAC252/1 - 100 meter
- PAC252/3 - 300 meter

## Cross sections:

---

